Specification
of CX-xx62

ø80/92/120 mm (Optional)

Fan Air Guide

Features of CX-xx62

Dimension (mm)	412(H)x185(W)x445(D)
Drive Bays	5.25" External x 4 3.5" External x 2, 3.5" Internal x 5
Expansion Slots	7
Mainboard	ATX/Micro ATX
Fan (mm)	Front: 80x80 x2 or 120x120 x1 (Optional) Rear: 80x80 x1 or Rear: 92x92 x1 (Optional) Side: 80x80 x1 (Optional)
Power Supply	PX/PL/PW/PK/PZ Series

Packing Information

	CUFT.	N.W.	G.W.	20FT	40FT	40HQ
CX-xx62	2.06'	6.56	7.59	510	1070	1210

Chassis

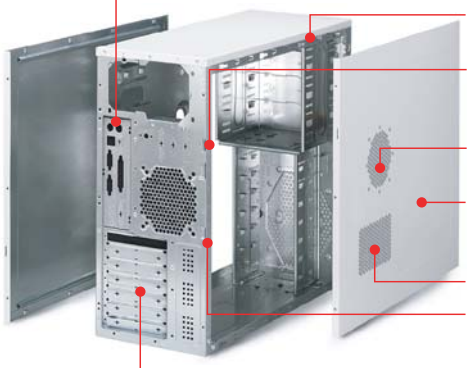

SGCC

Rear window EMI (CE) shield
To enhance EMI (CE) effect

Smooth edges
To provide greater safety for users

Intrusion Switch (Optional)
To monitor the status of the chassis cover

Side fan /Air-duct
Prescott version 1.1 : 80 mm

Textured design
To provide better feel and ease to handle

PCI-Express Graphics Vent

Kensington security slot
For kensington security cable purpose

Unique design
To increase ventilation efficiency

Front View

Front Fan:
80x80 mm x2 or
120x120 mm x1

Side View

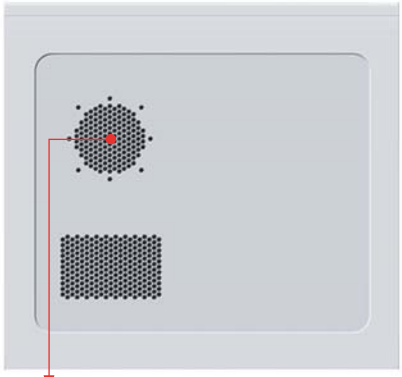

Side Fan:
80x80 mm x1

3.5" Drive Bays x7
External x2 / Internal x5

Back View

Rear Fan:
80x80 mm x1 or
92x92 mm x1

All brand names and trademarks are the property of their respective owners.

KME KEY MOUSE ELECTRONIC ENTERPRISE CO., LTD.